

Rec'd PCT/PTC 30 NOV 2004
GB / 03 / 2348



INVESTOR IN PEOPLE

BEST AVAILABLE COPY

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

REC'D 13 AUG 2003

WIPO


PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

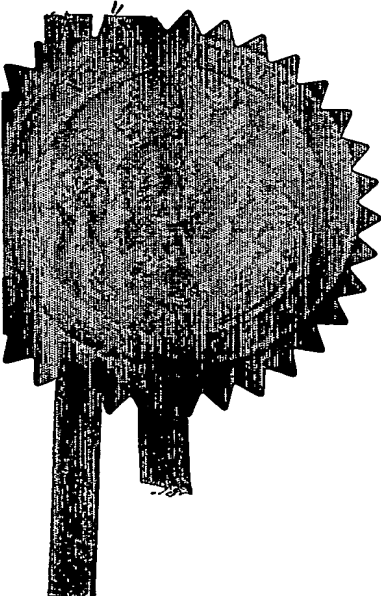

Signed

Stephen Hordley

Dated

8 July 2003

Patents Form 1/77

Patents Act 1977
(Rule 16)



31MAY02 E722939-1 C04150
P01/7700 05.00-0212633.2

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

THE PATENT OFFICE

31 MAY 2002

RECEIVED BY FAX

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference

516

2. Patent application number

(The Patent Office will fill in this part)

0212633.2

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

UWS VENTURES LIMITED
UNIVERSITY OF WALES
SINGLETON PARK
SWANSEA SA2 8PP
GB

8036394002

4. Title of the invention

ANTI-CORROSION PIGMENTS

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom
to which all correspondence should be sent
(including the postcode)

COHEN, ALAN NICOL
2 GROVE PLACE
TATSFIELD
Nr. WESTERHAM
KENT
TN16 2BB

Patents ADP number (if you know it)

6963557001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

YES

a) any applicant named in part 3 is not an inventor, or

b) there is an inventor who is not named as an applicant, or

c) any named applicant is a corporate body.

See note (d))

Patents Form 1/77

0038129 31 May 02 03:05

Patents Form 1/77

Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description

10

Claim(s)

2

Abstract

1

Drawing(s)

6

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

Date 31/05/02

12. Name and daytime telephone number of person to contact in the United Kingdom

A. N. Cohen

01959 577172

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.

- 1 -

Anti-corrosion Pigments

The present invention relates to anti-corrosion pigments based on clays.

5

Chromate (VI) based anti-corrosion pigments are widely used in primer systems for the protection of aluminium surfaces. However, the well-documented toxic and carcinogenic nature of Cr(VI) means that there is a requirement for effective, environmentally friendly alternatives. Considerable research is presently underway to elucidate the pathways by which water soluble Cr(VI)-oxo species inhibit corrosion activity on precipitation hardened aluminium aerospace alloys such as AA2024-T3, in order that other inhibitors exhibiting some, if not all of the attributes of CrO_4^{2-} can be developed.

10

It has been demonstrated that cation exchange pigments based on naturally occurring bentonite clay can efficiently inhibit corrosion driven delamination on galvanised steel surfaces. The bentonite ion exchange matrix provides a delivery system for inhibitor ions such as rare earth or alkali earth metal cations, which are only released when electrolyte is encountered on a corroding metal surface.

15

We have now found that an anionic clay can be used to generate anti-corrosion pigments capable of delivering anionic inhibitor species onto corroding metal surfaces.

20

According to the invention there is provided an exchangeable anion-bearing hydrotalcite powder as an anti corrosion pigment.

25

The invention also comprises protective coatings incorporating an exchangeable anion-bearing hydrotalcite powder as an anti corrosion pigment

30

Hydrotalcite type compounds refer to synthetic lamellar mixed hydroxides represented by the general formula $[\text{M}_2^{2+}_{1-x} \text{M}_3^{3+}_x (\text{OH})_2]^{x+} [\text{A}^{x-} \cdot n\text{H}_2\text{O}]$, where M2 is a divalent metal, M3 is a trivalent metal and A is an anion.

35

The hydrotalcites have a layer-type structure similar to brucite ($\text{Mg}(\text{OH})_2$). Isomorphous substitution of divalent metal ions (e.g. Mg^{2+}) with cations of higher charge (such as Al^{3+}) results in positively charged layers. Electroneutrality is preserved by anions (typically carbonate) located within the hydrated interlayer regions.

40

Any metal with the appropriate valency and suitable properties can be used and the preferred metal M2 is magnesium and the preferred metal M3 is aluminium.

- 2 -

Hydrotalcite materials have widespread use in the field of catalysis. Recent developments in HT based catalysts for a range of organic and inorganic reactions are comprehensively reviewed by Vaccari the reference below.

5 The HT matrix can be used as a generic support material for a wide range of potential inhibitor anions, which has the added benefit of enabling the performance of such species to be compared under identical conditions; this enables the HT anion-bearing pigment to be significantly more versatile than existing pigment technologies based on sparingly soluble salts. Any suitable anion can be used, the preferred anions are
10 anions with corrosion inhibitor properties; oxidising agents or bases and preferably are capable of becoming strongly adsorbed at metal surfaces and (hydr)oxide covered metal surfaces and are capable forming sparingly soluble precipitates with metal cations.

15 Preferred anions include a transition metal oxyanion, a group (III) oxyanion, a group (IV) oxyanion, a group (V) oxyanion, a group (VI) oxyanion, or a group (VII) oxyanion e.g. nitrate (NO_3^-), nitrite (NO_2^-), chromate (CrO_4^{2-}), dichromate ($\text{Cr}_2\text{O}_7^{2-}$), phosphate (PO_4^{3-}), carbonate (CO_3^{2-}), bicarbonate (HCO_3^-), molybdate (MoO_4^{2-}), permanganate (MnO_4^{2-}).

20 The anti-corrosion pigments can be made from commercially available hydrotalcite (HT) powder by a process comprising an initial heat treatment stage, followed by rehydration in an aqueous inhibitor anion solution to produce the anion exchange anti-corrosion pigment. The hydrotalcite clays which can be used as the anion exchange
25 matrix include commercially available magnesium aluminium hydroxy-carbonate powders.

30 Preferably the hydrotalcite clay is calcined (heated in air) to temperatures between 200°C and 600°C to produce an amorphous mixture of metal hydroxides. The amorphous mixture of hydroxides is then cooled to room temperature and rehydrated using an aqueous solution containing the desired exchangeable anion. It is thought that the rehydration acts to restore the lamella structure, generating positively charged magnesium-aluminium hydroxide (Brucite) layers with the exchangeable anion in the interlayer spaces.

35 The pigments of the present invention can be used in a suitable carrier to form an anti-corrosion surface coating such as a primer or paint to cover the surface to be treated. Any of the typically used carriers can be used depending on the application. Preferably the composition is applied as a film and such films can be formed based
40 on resins or polymers such as polyvinyl butyral (PVB) films, tall-oil modified polyester solutions etc.

It is a feature of the present invention that the HT based anion exchange pigments can provide an effective delivery system for dispensing inhibitor anions on corroding

- 3 -

aluminium surface and each hydrotalcite-based pigment can produce a profound inhibition of ffc attack when compared to control samples coated with un-pigmented PVB.

5 The invention is illustrated in the examples.

Examples

10 Model systems consisting of non-pretreated AA2024-T3 aluminium alloy substrates coated with polyvinyl butyral (PVB) films in which fixed volume fractions of HT based pigments are dispersed were tested. Following initiation by applying aqueous HCl onto a penetrative coating, the performance of inhibitor pigments dispersed in polyvinyl butyral (PVB) films was quantified by means of repeated in-situ scanning of a fixed sample area using a scanning Kelvin microprobe apparatus.

15 Referring to the drawings

Figure 1 is a schematic illustration showing the two stages of HT pigment preparation along with the structural transformations involved.

20 Figure 2 is a schematic diagram showing (a) sample preparation and (b) experimental procedure.

25 Figure 3 shows (a) The quantity of CrO_4^{2-} released from CrO_4^{2-} exchanged calcined HT, on dispersing 1g of HT in 100ml of 0.1M aqueous solutions of $\text{Na}_2\text{CO}_3^{2-}$, NaOH and NaCl (b) The quantity of CrO_4^{2-} released from 1g of CrO_4^{2-} exchanged calcined HT following successive re-dispersions in 100 ml aliquots of 0.1 M aqueous Na_2CO_3 .

30 Figure 4 are photographic images showing 1cm^2 areas surrounding a penetrative scribe on PVB coated AA2024-T3 aluminium alloy samples after a period of 7 days following ffc initiation using aqueous HCl, when maintained at a constant relative humidity of 93%. The appearance of a sample coated using un-pigmented PVB is shown in (a), while samples coated with carbonate, nitrate and chromate exchanged HT-containing films at a pigment volume fraction (ϕ) of 0.2 are given in (b), (c) and 35 (d) respectively.

Figure 5 shows the quantification of the average corroded sample area for AA2024-T3 samples coated using HT pigmented and un-pigmented PVB films after a period of 7 days following ffc initiation.

40 Figure 6 shows FFC delaminated area, quantified by repetitive scanning of a fixed sample area by means of a SKP apparatus, plotted as a function of time for PVB coated AA2024-T3 samples in the presence and absence of HT inhibitor pigment.

Key: (a) unpigmented PVB, (b) CO_3^{2-} -HT, (c) NO_3^- -HT, and (d) CrO_4^{2-} -HT at pigment volume fractions of 0.2.

5 1. Pigment preparation

Hydrotalcite (HT) powder ($\text{Mg}_6\text{Al}_2(\text{OH})_{16}\text{CO}_3 \cdot 4\text{H}_2\text{O}$) was obtained from the Aldrich Chemical Company. Prior to ion exchange, the powder was heat treated at 450°C for 3h, whereupon the layered structure of the hydrotalcite collapses with the evolution of CO_2 and water. 10g of the resultant powder, consisting of an amorphous mixture of magnesium and aluminium hydroxides, was then dispersed in 100 cm^3 of aqueous 0.1 mol dm^{-3} solutions of the either NaNO_3 , Na_2CO_3 or Na_2CrO_4 and stirred for 3h. The rehydration of the heat-treated HT leads to the reconstruction of the layered structure, which is accompanied by the intercalation of anions from solution. The two stages of anion exchange process are represented schematically in Figure 1. After anion exchange, the HT powder was exhaustively washed by repeated cycles of centrifugation and re-dispersion in fresh distilled water until sodium ions could no longer be detected in the supernatant when using flame ionisation testing. Finally the powders were allowed to dry in air and pulverised to give a particle size of $<20\mu\text{m}$ diameter.

Details

1. Hydrotalcite (HT) powder ($\text{Mg}_6\text{Al}_2(\text{OH})_{16}\text{CO}_3 \cdot 4\text{H}_2\text{O}$) was calcined at 450°C for 3h, whereupon the layered structure of the hydrotalcite collapsed with the evolution of CO_2 and water. The resultant powder (10g), consisting of an amorphous mixture of magnesium and aluminium hydroxides, was then dispersed in 100 cm^3 of aqueous 0.1 mol dm^{-3} solutions of NaNO_3 and stirred for 3h. The rehydration of the heat-treated HT produced a reconstruction of the layered structure and anion (NO_3^-) incorporation. After anion incorporation, the HT powder was exhaustively washed by repeated cycles of centrifugation and re-dispersion in fresh distilled water until sodium ions could no longer be detected in the supernatant when using a flame emission test. Finally the powders were allowed to dry in air and pulverised to give a particle size of $<20\mu\text{m}$ diameter. A polyvinyl butyral (PVB) solution was prepared in ethanol (15% w/w) and sufficient hydrotalcite powder added, in the form of an ethanolic slurry, to give a pigment volume fraction of 0.15 in the final (solvent free) coating. The components were mixed thoroughly using a high shear blender to produce an anti-corrosion paint. The hydrotalcite pigmented PVB solution was bar cast on to a clean metal surface and allowed to dry in air. This procedure gave an anti-corrosion coating (paint film) with a dried film thickness of $30\mu\text{m}$ as measured using a micrometer screw gauge.

2. Hydrotalcite (HT) powder ($\text{Mg}_6\text{Al}_2(\text{OH})_{16}\text{CO}_3 \cdot 4\text{H}_2\text{O}$) was calcined at 450°C for 3h. The resultant powder (10g), consisting of an amorphous mixture of magnesium

- 5 -

and aluminium hydroxides, was then dispersed in 100 cm³ of aqueous 0.1 mol dm⁻³ solutions of Na₂CO₃ and stirred for 3h. The rehydration of the heat-treated HT produced a reconstruction of the layered structure and anion (CO₃²⁻) incorporation. After anion incorporation, the HT powder was exhaustively washed by repeated cycles of centrifugation and re-dispersion in fresh distilled water until sodium ions could no longer be detected in the supernatant when using a flame emission test. Finally the powders were allowed to dry in air and pulverised to give a particle size of <20µm diameter. A tall-oil modified polyester solution was prepared in 1:1 ethanol:toluene (15% w/w) and sufficient hydrotalcite powder added, in the form of an ethanolic slurry, to give a pigment volume fraction of 0.2 in the final (solvent free) coating. The components were mixed thoroughly using a high shear blender to produce an anti-corrosion paint. The hydrotalcite pigmented polyester solution was bar cast on to a clean metal surface and allowed to dry in air. This procedure gave an anti-corrosion coating (paint film) with a dried film thickness of 30 µm as measured using a micrometer screw gauge.

3. Hydrotalcite (HT) powder (Mg₆Al₂(OH)₁₆CO₃·4H₂O) was calcined at 450°C for 3h. The resultant powder (10g), consisting of an amorphous mixture of magnesium and aluminium hydroxides, was then dispersed in 100 cm³ of aqueous 0.1 mol dm⁻³ solutions of ammonium molybdate ((NH₄)₂MoO₄) and stirred for 3h. The rehydration of the heat-treated HT produced a reconstruction of the layered structure and anion (MoO₄²⁻) incorporation. After anion incorporation, the HT powder was exhaustively washed by repeated cycles of centrifugation and re-dispersion in fresh distilled water until ammonia could no longer be detected in the supernatant by alkalisation and testing with damp litmus. Finally the powders were allowed to dry in air and pulverised to give a particle size of <20µm diameter. An ethyl cellulose solution was prepared in 1:1 ethanol: toluene (15% w/w) and sufficient hydrotalcite powder added, in the form of an ethanolic slurry, to give a pigment volume fraction of 0.15 in the final (solvent free) coating. The components were mixed thoroughly using a high shear blender to produce an anti-corrosion paint. The hydrotalcite pigmented ethyl cellulose solution was bar cast on to a clean metal surface and allowed to dry in air. This procedure gave an anti-corrosion coating (paint film) with a dried film thickness of 30 µm as measured using a micrometer screw gauge.

2. Sample preparation

All tests were carried out using AA2024-T3 aluminium alloy (composition by weight : 0.5% Si , 0.5% Fe, 3.8 – 4.9% Cu, 0.3 – 0.9% Mn, 1.2 – 1.8% Mg, 0.1% Cr, 0.25% Zn) supplied by BAE Systems Ltd. Samples were cut into 35 mm square coupons and abrasively cleaned using an aqueous slurry of 5 µm polishing alumina, followed by degreasing in acetone. Poly vinyl butyral (PVB) solutions were prepared in ethanol (15% w/w) and any required amount of exchanged hydrotalcite powder added as an ethanolic slurry. The components were mixed thoroughly using a high shear blender.

- 6 -

Pigmented PVB solutions were bar cast on to the clean sample surface as shown in Figure 2(a) and allowed to dry in air. This procedure gave a dried film thickness of 30 μm as measured using a micrometer screw gauge. Filiform corrosion was initiated by applying a 1 μl volume of aqueous HCl (0.5 mol dm^{-3}) along the length of a 10 mm defect, scribed in the centre of the coated sample using a scalpel blade (see Figure 2(b)). In each case it was ensured that the direction of the scribe was normal to that of substrate extrusion. After allowing any excess water to evaporate, the sample was placed in the environmental chamber of the scanning Kelvin microprobe (SKP) apparatus. Repetitive scans were carried out every 4 hours on a 1 cm^2 area of the coated AA2024-T3 alloy sample encompassing the scribe, using a data point density of 10 points per mm and a mean probe to sample height of 100 microns. In separate experiments, duplicate samples were initiated by the same procedure and placed in a separate environment chamber maintained at a constant relative humidity of 93%. After a period of 1 week following initiation, these samples were removed and photographic images of any corroded regions were recorded.

Full details of the SKP instrument used in this work can be found in reference 3 below. The scanning reference probe consisted of a 125 μm diameter gold wire vibrated along its long axis and normal to the sample surface with amplitude 40 μm and frequency 280Hz. The sample to be scanned was held in a thermostated stainless steel environment chamber. A constant relative humidity of 93% was achieved by the presence of a reservoir containing saturated $\text{Na}_2\text{SO}_4 \cdot 10\text{H}_2\text{O}$ (aq), maintained at a temperature of 20°C . Prior to commencement of a scanning experiment, the SKP was calibrated in terms of electrode potential using the established procedure of reference 3. This involved measuring the free corrosion potential, E_{corr} (vs. SCE) and the Kelvin potential, E_{KP} simultaneously for a series of couples (Ag/Ag^+ , Cu/Cu^{2+} , Fe/Fe^{2+} and Zn/Zn^{2+}). For this purpose a series of calibration cells, were prepared by machining wells (8mm diameter, 1mm deep) in discs of the relevant metal (15 mm diameter, 5 mm thick). These wells were then filled with a 0.5 mol dm^{-3} aqueous solution of the respective metal chloride salt (0.5 mol dm^{-3} nitrate salt in the case of Ag. The influence of the PVB coating on calibration was taken into account by placing a free-standing PVB film in contact with the meniscus of the calibration electrolyte, allowing the electrolyte, PVB film and SKP chamber atmosphere to become equilibrated, and then measuring E_{KP} at the PVB-air interface.

Results

3. HT anion exchange capacity

The anion exchange properties of both calcined and as-received hydrotalcite was conveniently studied by spectrophotometric means for samples treated with aqueous CrO_4^{2-} solutions. The UV-visible absorbance of the yellow coloured chromate anion at a λ_{max} of 370 nm was used to quantitatively analyse the exchangeable Cr(VI) content of the HT pigments prepared. As-received commercially available HT

- 7 -

powder does not readily disperse in aqueous media and a chromate containing 50 vol% ethanol/water was used for this material. Attempts to exchange CrO_4^{2-} into the un-calcined HT matrix proved largely unsuccessful and as a consequence, less than 0.01 mmol of exchangeable Cr(VI) per gram of CrO_4^{2-} -treated starting material could be detected in back exchange experiments employing $0.1 \text{ mol dm}^{-3} \text{ Na}_2\text{CO}_3$ aqueous solutions.

However, following calcination at temperatures of 400°C or higher, treatment of the HT powder with aqueous CrO_4^{2-} containing solutions leads to a significant take-up of Cr(VI) resulting in a yellow colouration of the processed HT powder. An optimum calcination temperature of 450°C , giving maximum anion sorption capacity was used. Back exchange using a 1g quantity of powder dispersed in 100 cm^3 of $0.1 \text{ mol dm}^{-3} \text{ Na}_2\text{CO}_3$ (aq), showed an exchangeable Cr(VI) content of approximately 0.3 mmol/g. Figure 3(a) shows a comparison of Cr(VI) exchange efficiency in the presence of various commonly encountered anions at the same concentration. The effect of successive back exchanges carried out in aqueous carbonate solution for the same 1g quantity of Cr(VI)-HT is given in Figure 3(b). It may be seen that the majority of ion exchange occurs within the initial back exchange. The total exchange capacity of the Cr(VI)-HT powder, over 4 successive back-exchanges using CO_3^{2-} anions, was calculated to be 0.7 mill equivalents per gram of pigment, corresponding to 0.35 mmol/g of exchangeable CrO_4^{2-} .

4. Anti-corrosion performance of HT pigments

The typical appearance of coated AA2024-T3 samples maintained at 93% rh for a period of 7 days following ffc initiation using aqueous HCl are shown in Figure 4. The marked extent of ffc attack observed for the un-pigmented coating is consistent with results presented previously for the same model system (References 1, 2). However, the three samples illustrated in Figures 4(b), (c) and (d), coated with PVB films incorporating CO_3^{2-} , NO_3^- and CrO_4^{2-} exchanged HT pigments respectively, show markedly reduced susceptibility to ffc attack. The use of image analysis software permits quantification of the sample area affected by ffc activity and the average results obtained for duplicate test samples coated with the four different PVB based films are summarised in Figure 5. Further details of parameters such as the average number of filaments per sample are average filament extension and width is provided in Table 1. Although the presence of exchangeable nitrate ions appear to more efficiently inhibit ffc when compared to carbonate and a corroded sample area basis, there are a significantly greater number of what appear to be filament initiation sites. NO_3^- ions appear to markedly limit the size of filaments, though not their number, while the presence of CO_3^{2-} acts in the reverse fashion, limiting the number, though not the size of any filaments. As expected, the incorporation of chromate ions profoundly inhibits any ffc activity, and the anti-corrosion performance of the Cr(VI)-HT pigment is comparable with SrCrO_4 under the same conditions. However, it should be noted that the actual CrO_4^{2-} content of the HT pigment coating, calculated

- 8 -

on a molar basis, is about 30 times less than for the same polymer system containing SrCrO_4 at similar pigment volume fractions. Obviously this has important environmental connotations with regard to the long term release of Cr(VI) species from anti-corrosion coatings based on these materials.

5

4. SKP analysis of pigment efficiency

10 Repeated scanning of AA2024-T3 samples coated with unpigmented PVB films and with PVB films containing the 3 different types of HT based pigments at a fixed volume fraction of 0.2, was used to generate a series of time lapse animations showing dynamic changes in local free corrosion potential (E_{corr}). A methodology for quantifying the time-dependent progress of ffc filament populations by comparing the spatial distribution of E_{corr} values between successive SKP scans has been described in detail in references 22 and 23. Using this approach, the effect of HT pigmentation
15 on ffc delamination kinetics is shown in figure 6. The advantage of using the SKP technique to quantify delaminated area in terms of E_{corr} in preference to visual inspection methods, is that some areas of underfilm corrosion may be obscured by the inclusion of pigment. It may be seen from Figure 6 that for an unpigmented PVB coating the ffc delaminated area growth is linear with respect to time. However, for
20 each HT pigment type, an initial increase of delaminated area with time over the first 24 h after initiation, is followed by a marked reduction in delaminated area growth for further periods of up to 4 days. As observed previously in Figures 4 and 5, the SKP analysis confirms that the efficiency of ffc inhibition increases with the type of exchangeable anion in the order $\text{CO}_3^{2-} < \text{NO}_3^- < \text{CrO}_4^{2-}$. The potential mode of
25 operation of an anion exchanged HT inhibitor pigment on a corroding aluminium surface is thought to proceed in two stages. The first involves the initial removal of Cl^- ions at the initiation stage and the subsequent release of inhibitor ions into the electrolyte covered bare metal defect. The second mode of inhibition occurs in the underfilm region when the initiating electrolyte has penetrated the metal-coating
30 interface. Upon contact with the chloride-containing electrolyte within a filament head, inhibitor anions are released directly into the head regions, along with concomitant removal of Cl^- from the underfilm electrolyte.

35 4. Conclusion

The examples studied the efficiency of carbonate, nitrate and chromate exchanged HT pigments in forestalling filiform corrosion on PVB coated AA2024-T3 aluminium alloy surface by a combination of scanning Kelvin probe (SKP) and visual
40 examination techniques. Samples were initiated by placing a known quantity of aqueous HCl on to a penetrative coating defect and maintained at a constant relative humidity of 93% for periods of up to 1 week.

As can be seen the incorporation of the HT based pigments profoundly inhibits the progress of ffc activity for up to 7 days following initiation. SKP quantification of the growth of delaminated area with time reveals that for each inhibitor ion, an initial increase in delaminated area over an initial 24h period is followed by a marked slow-down in rate for the remaining experimental duration. The efficiency of the inhibition of ffc is dependent upon the nature of the exchangeable anion present and increases in the order $\text{CO}_3^{2-} < \text{NO}_3^- < \text{CrO}_4^{2-}$.

Table 1: Characteristics of ffc behaviour observed for PVB coated AA2024-T3 samples in the presence and absence of HT inhibitor pigments.

Inhibitor	Average filament extension (mm)	Average filament width (mm)	Number of filaments	Corroded area (mm^2)
none	2.92	0.93	10	35.32
carbonate	1.63	0.8	4	7.95
nitrate	0.68	0.52	12	4.66
chromate	0.9	0.71	1	1.45

References

1. S.A. Katz and H. Salem, *J. Appl. Toxicology*, **13**, 217 (1993).
2. S. Långård and T. Norseth, *Br. J. Ind. Medicine*, **32**, 62 (1975).
3. C. Sheffert, *Arch. Environ. Health*, **37**, 44 (1942).
4. U.S. Environmental Protection Agency, *Health Assessment Document for Chromium, Final Report*, EPA-600/8-83-014F, p.21, (1984).
5. L. Xia, E. Akiyama, G. Frankel and R. McCreery, *J. Electrochem Soc.*, **147**, 2556, (2000).
6. J. Zhao, L. Xia, A. Sehgal, D. Lu, R. McCreery and G. Frankel, *Surf. Coat. Technol.*, **140**, 51, (2001).
7. A. Kolics, A.S. Besing and A. Wiekowski, *J. Electrochem. Soc.*, **148**, B322, (2001).
8. A. Sehgal, D. Lu and G. Frankel, *J. Electrochem. Soc.*, **145**, 2834, (1998).
9. G.O. Ilevbare and J.R. Scully, *J. Electrochem. Soc.*, **148**, B196, (2001).
10. M. Kendig, R. Addison and S. Jeanjaquet, *J. Electrochem. Soc.*, **146**, 4419, (1999).
11. M. Kendig, S. Jeanjaquet, R. Addison and J. Waldrop, *Surf. Coat. Technol.*, **140**, 58, (2001).
12. S. Bohm, H.N. McMurray, D.A. Worsley and S.M. Powell, *Mater. Corros.*, **52**, 889, (2001).
13. G. Williams, H.N. McMurray and D.A. Worsley, *J. Electrochem. Soc.*, **149**, B154, (2002).
14. R.D. Shannon, *Acta Crystallographica A*, **32**, 751 (1976).
15. A Vaccari, *Appl. Clay Sci.*, **14**, 161, (1999).
1. S. Miyata, *Clays and Clay Minerals*, **31**, 305, (1983).

- 10 -

16. R.L. Goswamee, P. Sengupta, K.G. Bhattacharyya and D.K.Dutta, *Appl. Clay Sci.*, **13**, 21, (1998).
17. F. Kovanda, E. Kovacsova and D. Kolousek, *Collect. Czech. Chem. Commun.*, **64**, 1517 (1999).
- 5 18. M. Bellotto, B. Rebours, O. Clause, J. Lynch, D. Bazin and E. Elkaim, *J. Phys. Chem.*, **100**, 8535, (1996).
19. G. Williams, H.N. McMurray and D.A. Worsley, *J. Forensic Sci.*, **46**, 1085 (2001).
20. G. Williams and H.N. McMurray, *J. Electrochem. Soc.*, **148**, B337, (2001).
- 10 21. G. Williams and H.N. McMurray, *Eurocorr 2001 congress proceedings*, Riva del Garda, Italy, October 2001.
22. H.N. McMurray, G. Williams and S. O'Driscoll, *Proceedings of the 99th Electrochemical Society Meeting*, San Fransisco, September 2001.

15

518 Anti-corrosion Pigment as filed
31-May-02 - 13:51

- 11 -

Claims

1. An anti-corrosion pigment comprising an exchangeable anion-bearing hydrotalcite.
5
2. An anti-corrosion pigment as claimed in claim 1 in which the hydrotalcite is a lamellar mixed hydroxide represented by the general formula $[M^{2+}_{1-x} M^{3+}_x(OH)_2]^{x+} [A^{n-}. nH_2O]$, where M2 is a divalent metal, M3 is a trivalent metal and A is an exchangeable anion.
10
3. An anti-corrosion pigment as claimed in claim 1 or 2 in which M2 is magnesium and M3 is aluminium.
4. An anti-corrosion pigment as claimed in any one of claims 1 to 3 in which the exchangeable anion is an anion with corrosion inhibitor properties.
15
5. An anti-corrosion pigment as claimed in any one of claims 1 to 4 in which the exchangeable anion is an oxidising agent.
20
6. An anti-corrosion pigment as claimed in any one of claims 1 to 5 in which the exchangeable anion is a base.
7. An anti-corrosion pigment as claimed in any one of claims 1 to 6 in which the exchangeable anion is capable of becoming strongly adsorbed at metal surfaces and (hydr)oxide covered metal surfaces.
25
8. An anti-corrosion pigment as claimed in any one of claims 1 to 7 in which the exchangeable anion is capable forming sparingly soluble precipitates with metal cations.
30
9. An anti-corrosion pigment as claimed in any one of claims 1 to 3 in which the anion is a transition metal oxyanion, a group (III) oxyanion, a group (IV) oxyanion, a group (V) oxyanion, a group (VI) oxyanion or a group (VII) oxyanion.
35
10. An anti-corrosion pigment as claimed in claim 9 in which the anion is nitrate (NO_3^-), nitrite (NO_2^-), chromate (CrO_4^{2-}), dichromate ($Cr_2O_7^{2-}$), phosphate (PO_4^{3-}), carbonate (CO_3^{2-}), bicarbonate (HCO_3^-), molybdate (MoO_4^{2-}) or permanganate (MnO_4^{2-}).
40
11. An anti-corrosion pigment as claimed in any one of claims 1 to 10 in which the pigment is made by a process comprising (i) heating the hydrotalcite clay and (ii) re-hydrating the clay in an aqueous solution containing the anion.

- 12 -

12. An anti-corrosion pigment as claimed in claim 11 in which the hydrotalcite is amagnesium aluminium hydroxy-carbonate powder.
- 5 13. An anti-corrosion pigment as claimed in claim 12 in which the hydrotalcite is $(\text{Mg}_6\text{Al}_2(\text{OH})_{16}\text{CO}_3 \cdot 4\text{H}_2\text{O})$.
- 10 14. An anti-corrosion pigment as claimed in any one of claims 12 to 14 in which the hydrotalcite clay is calcined at a temperature of between 200°C and 600°C to produce an amorphous mixture of Al and Mg hydroxides and the amorphous mixture of hydroxides then cooled to room temperature and rehydrated using an aqueous solution containing the exchangeable anion.
- 15 15. An anti-corrosion formulation comprising an inhibitor pigments as claimed in any one of claims 1 to 15 dispersed in a film-forming formulation or binder.
16. An anti-corrosion formulation as claimed in claim 15 in which the film-forming formulation or binder is a polymeric binder.
- 20 17. An anti-corrosion formulation as claimed in claim 15 or 16 in which the binder is a polyvinyl butyral (PVB) film or a tall-oil modified polyester solution.
18. An anti-corrosion formulation as claimed in claim 15, 16 or 17 which is a primer or paint or can form a lamellar coating.

316 Anti-corrosion Pigment as filed
31-May-02 - 13:55


- 13 -

Abstract

- 5 Corrosion inhibitor pigments consisting of nitrate, carbonate and chromate (VI) -
exchanged hydrotalcite are effective for the inhibition of filiform corrosion (ffc) on
coated AA2024-T3 aluminium alloy samples.

1/6


Figure 1

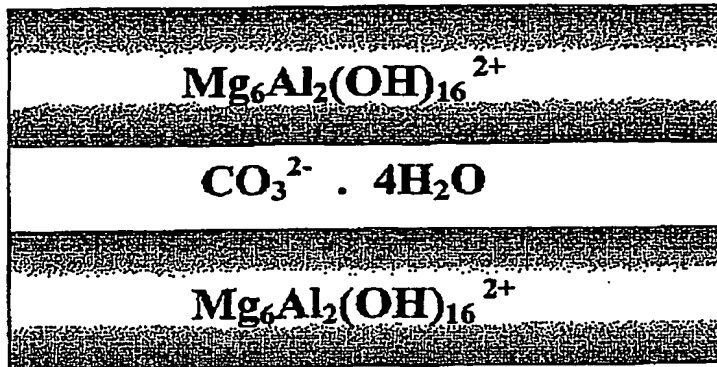

STEP 1
 $T = 450^\circ\text{C}$
 $\uparrow\text{CO}_2, \uparrow\text{H}_2\text{O}$

**Amorphous mixture of
Mg, Al hydroxides**


STEP 2
*Dispersion in
aqueous solution of
desired anion*

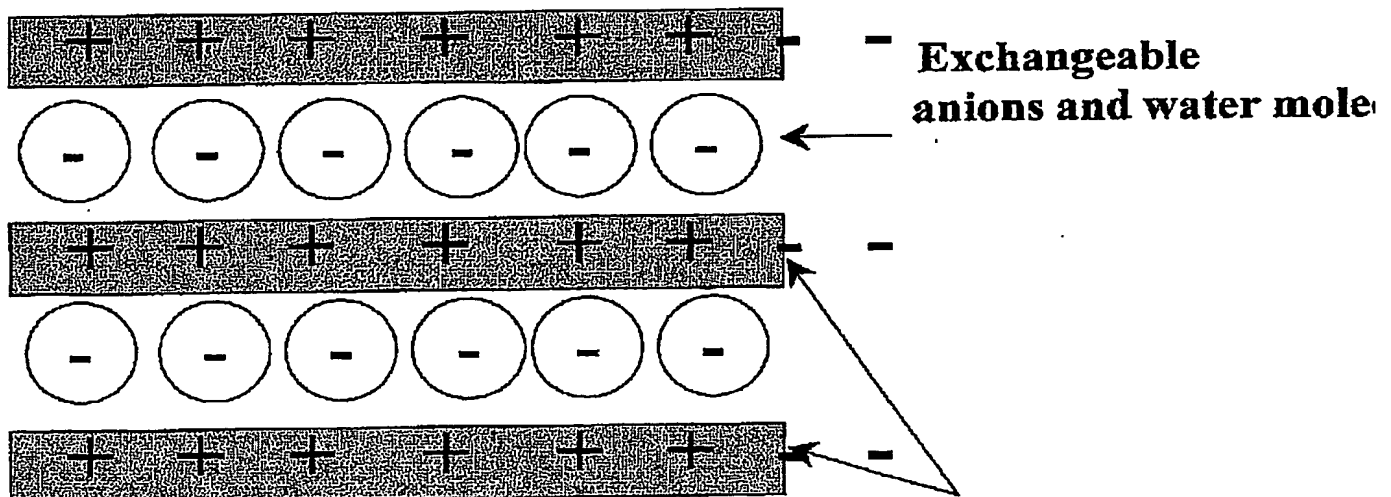

**Positively charged
Magnesium aluminium hydroxide "b"**



2/6

Figure 2

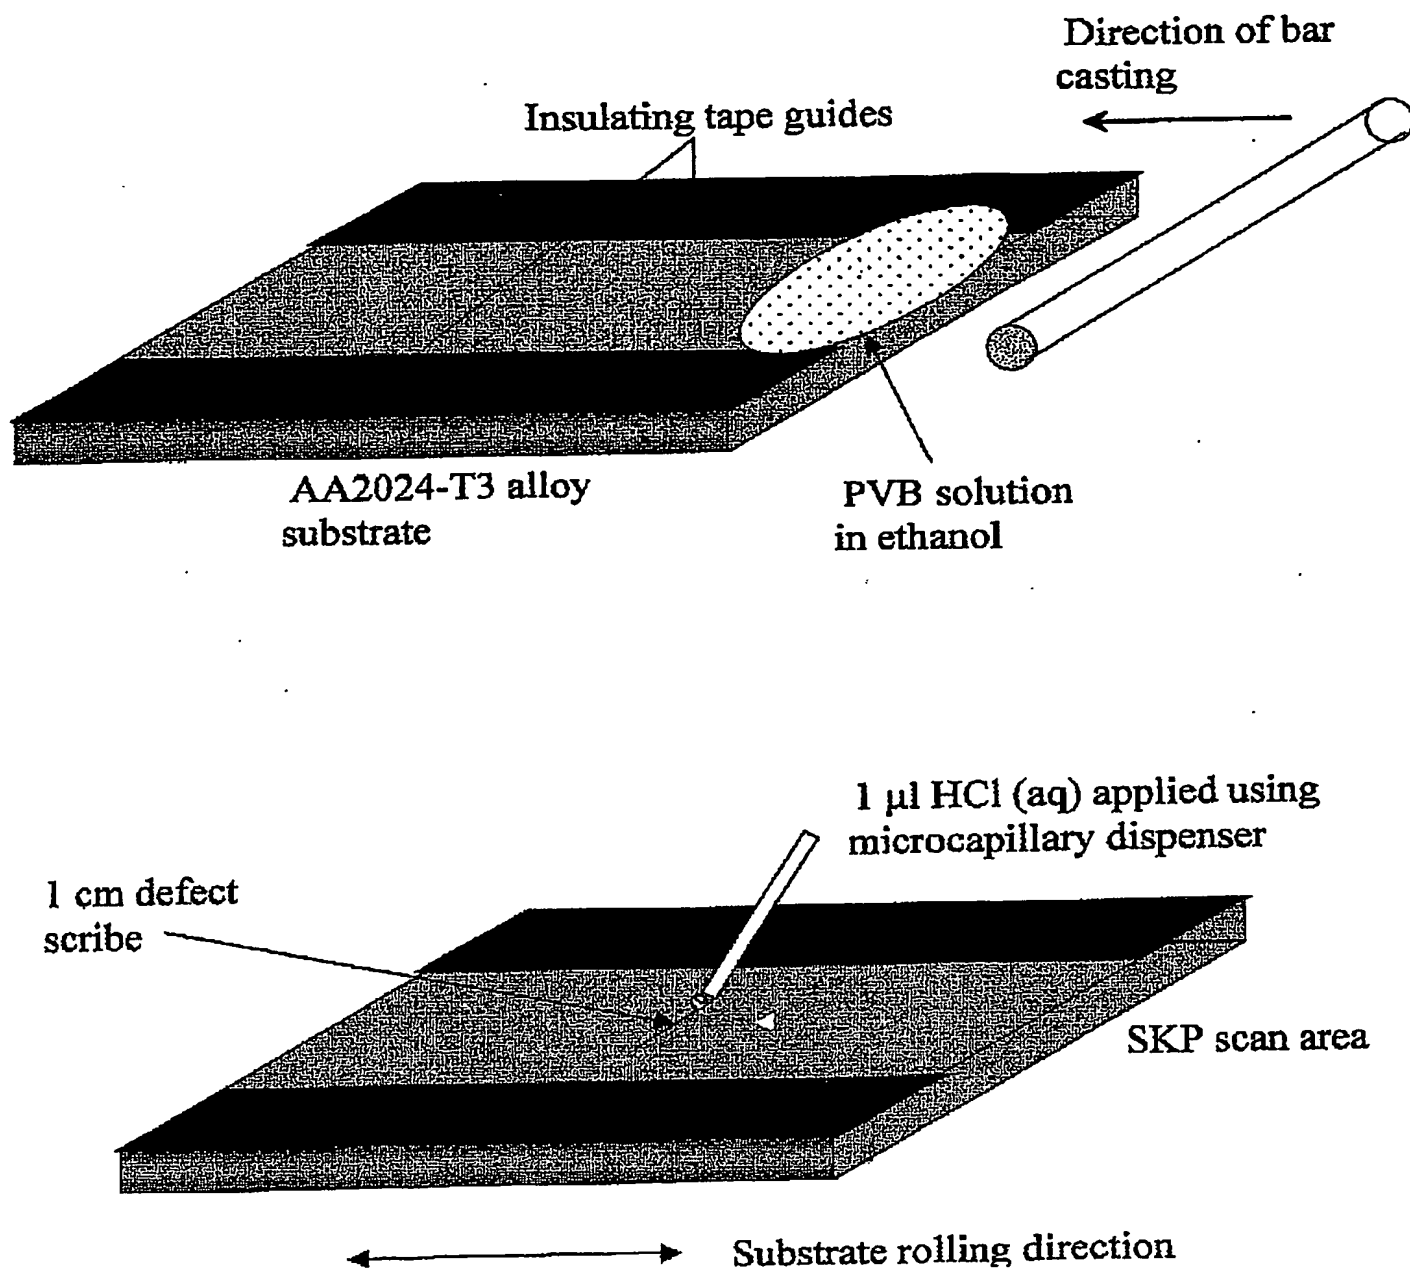

3/6

Figure 3

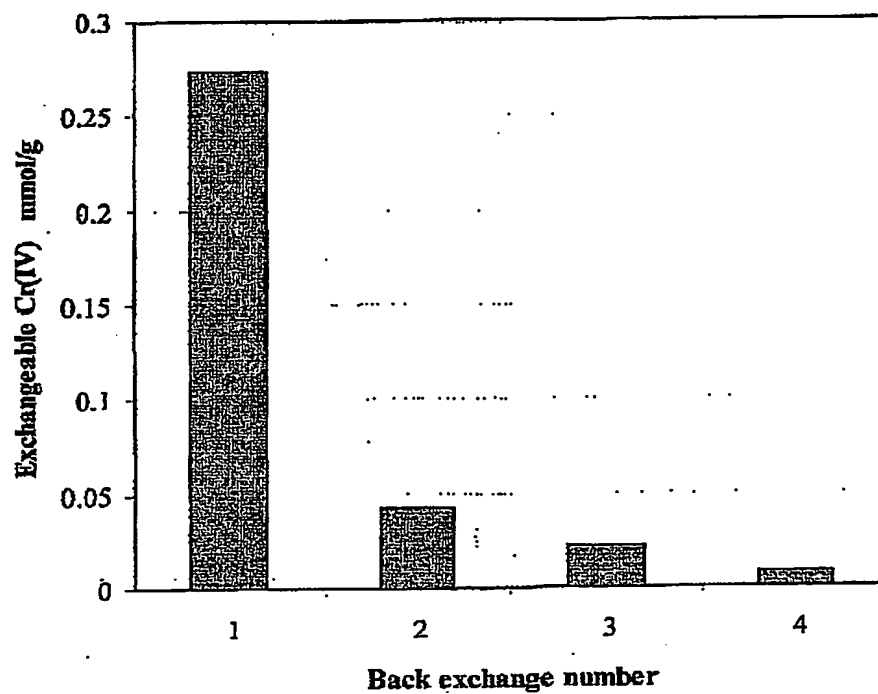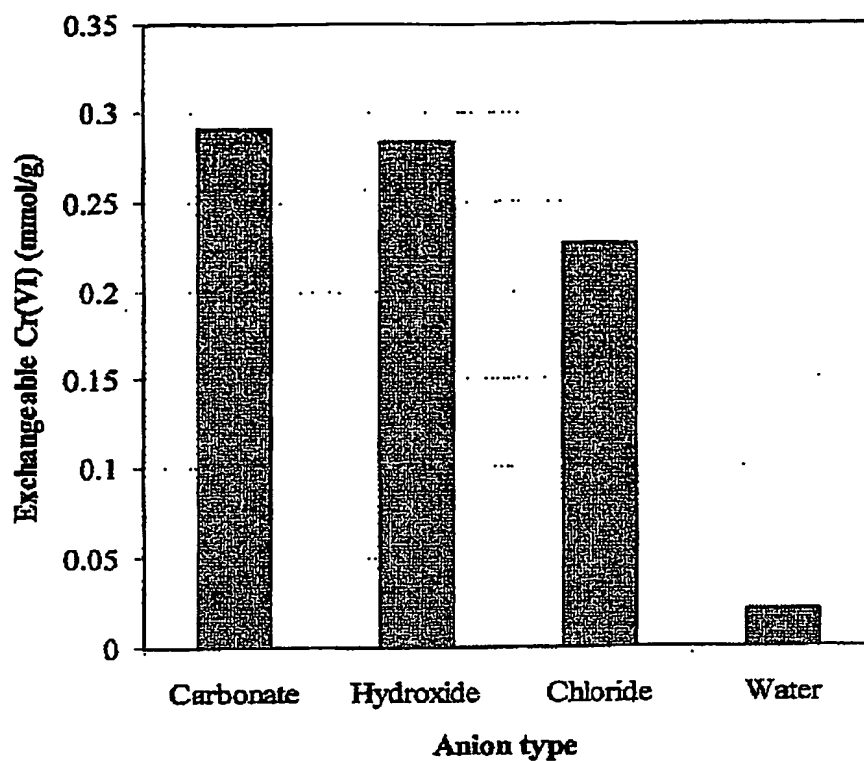


4/6

Figure 4

(a)




(b)

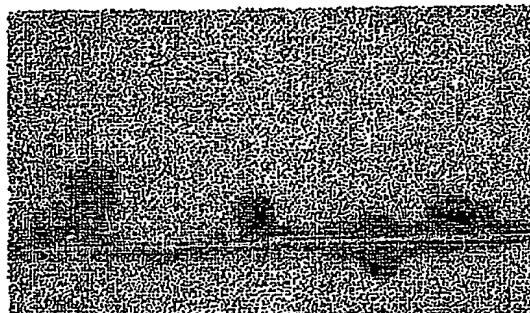


5/6

Figure 5

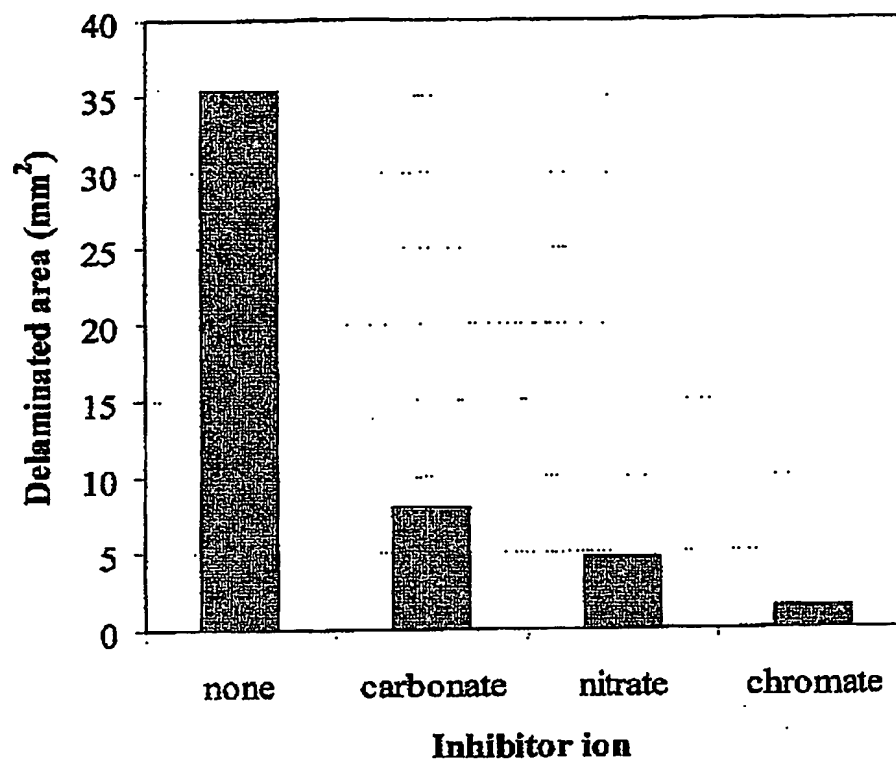

6/6

Figure 6

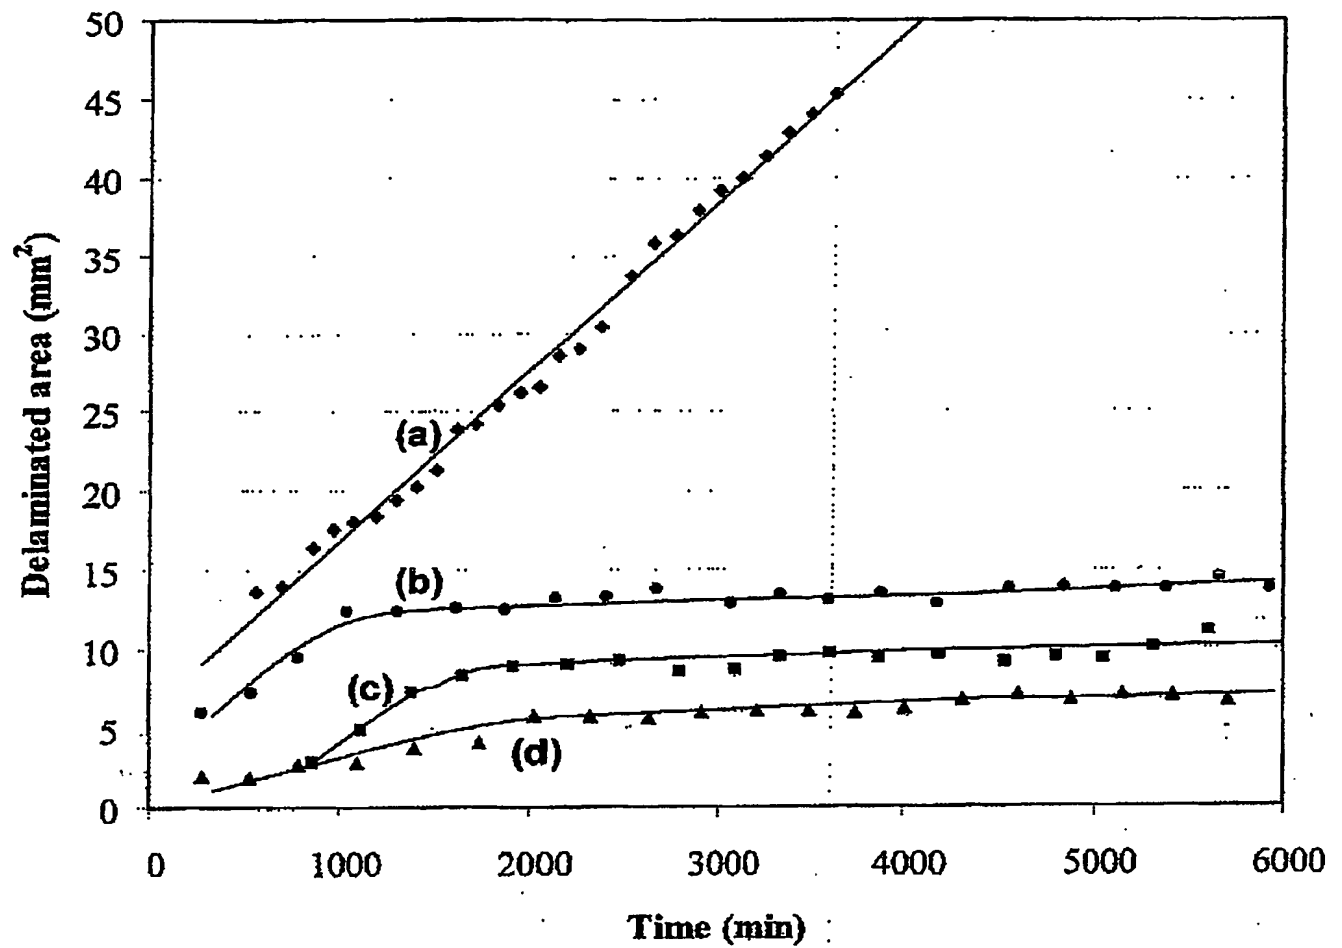

THE PATENT OFFICE

09 JUL 2003

Received in Patents
International Unit

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.